# Inductive Proximity Sensor 18mm Square Plastic Housing



### RoHS Compliant



#### **Features**

- Inductive sensor, style: squared shape, 18mm × 10mm × 31mm
- · Mounting distance: 5mm shielded
- · With LED operation indicate lamp, easily identifiable
- · Standard sensing object: ferrous metals
- · Protection rate: IP67, water resistant
- · Over-current and short circuit protection; against polarity reversal.
- Widely applied in measuring, Counting, Rpm measuring in mechanism, chemical, paper manufacture light industry, etc.

#### **Specifications**

Mounting Distance : 5mm Shielded
Sensing Distance : 4.5mm Shielded
Power Supply : 10V DC to 30V DC

Frequency: 500Hz / 250Hz (DC 3/2 wires)

Current Output (DC) : 200mA


Ambient Temperature : -20°C to 70°C


Against Polarity Reversal : Yes


Short Circuit Protected : 3 wires: Yes / 2 wires: No

IP Rating : IP67

#### **Electrical Connection**








#### **Picture Of Product**

#### Flush (shielded)

Unit: mm



Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro




### **Inductive Proximity Sensor** 18mm Square Plastic Housing Multicomp PRO




#### Installation

If used in an area surrounded by metal, Install the proximity Sensor as follows . (Sn = Sensing distance)

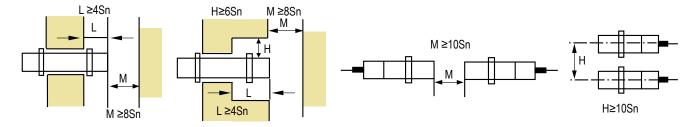


#### **Inductive Proximity Application Direction**

- A. Set mounting distance equal to 80% of Sn.
- B. Set mounting distance roughly equal to 50% of Sn when sensor is used measuring mounting frequency or operating in high speed circumstances.
- C. Mounting distance will change depending on material (iron, stainless steel, brass, copper and aluminium).

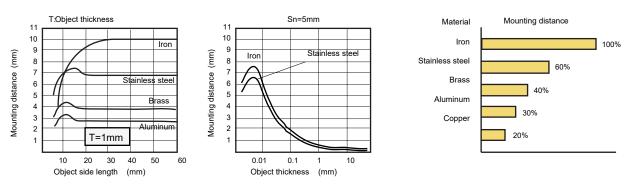

D. Inductive Proximity series connection and parallel connection





# Inductive Proximity Sensor 18mm Square Plastic Housing



#### **Part Number Table**

Part Number	Output Type	Mounting Distance	Current Output	Power Supply	Wire Connector
MP002217	NPN NO	5mm Shielded	≤ 200mA	10V DC to 30V DC	3 Wire
MP002218	NPN NC				
MP002219	PNP NO				
MP002220	PNP NC				
MP002221	DC NO				2 Wire
MP002222	DC NC				

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro sg.element14.com/b/multicomp-pro

